


MF25090

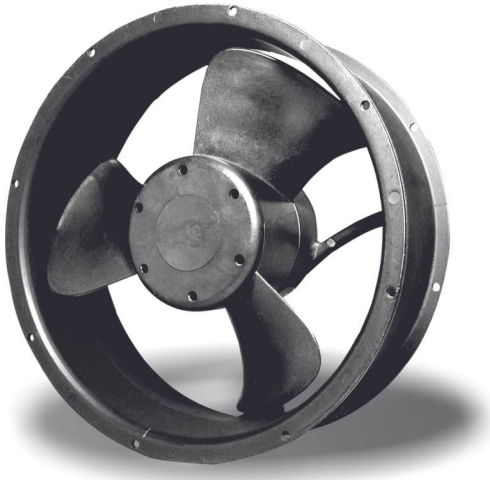

Size: Ø250 x 89mm (Ø10 x 3.49 inch.)
 Motor: Shaded Pole
 Frame: Aluminum Die-Cast
 Impeller: PBT + 30% Fiber Glass. UL94V-0
 Lead Wire: 1007# 18AWG. UL/CSA
 Insulation Resistance:
 Min 10 M Ohm at 500VDC Between Terminal and the Frame
 Dielectric Strength: 1 min at 1,500VAC 50/60Hz
 Bearing Type: 2 Ball Bearing
 Operating Temp: Ball Bearing: Within -20 ~ 80°C
 Life Expectancy: Ball Bearing: 50,000 hours at 60°C
 Net Weight: 1,780 grams

Ø250x90 mm

Fan guard corresponding model			
Metal	Plastic	Plastic filter	Ventilator Filter
FG-250	☹	☹	MA-08

Part No.	Bearing system	Rated Voltage (V)	Freg (Hz)	Current (A)	Input Power (W)	Speed (rpm)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise Level (dB-A)	Weight (g) (重量)
25090A1HBAL	Ball	110/120	50/60	0.36/0.40	40/48	1600/1700	480/550	0.31/0.42	48/56	1780
25090A2HBAL	Ball	220/240	50/60	0.16/0.22	40/52	1600/1700	480/550	0.31/0.42	48/56	1780

■ Specifications subject to change without notice.

