


MF8038

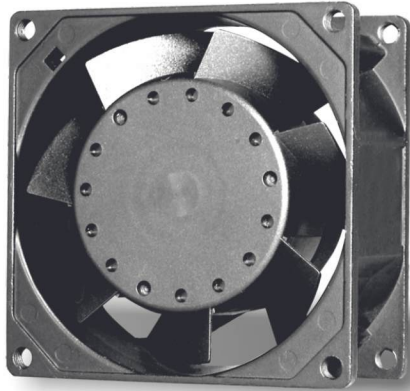

Size : 80 x 80 x 38mm (3.15 x 3.15 x 2.815 inch)
 Motor : Shaded Pole
 Frame : Aluminum Die-Cost
 Impeller : PBT + 30% Fiber Glass. UL94V-0
 Lead Wire : 1007# 22AWG. UL/CSA
 Insulation Resistance :
 Min 10 M Ohm at 500VDC Between Terminal and the Frame
 Dielectric Strength : 1 min at 1,500VAC 50/60Hz
 Bearing Type : B: 2 Ball Bearing S: Sleeve Bearing
 Operating Temp : Ball: Within -20 ~ 80°C
 Sleeve: Within -10 ~ 56°C
 Life Expectancy : Ball: 50,000 hours at 60°C
 Sleeve: 20,000 hours at 45°C
 Net Weight : 293 grams

80x80x38mm

Fan guard corresponding model			
Metal	Plastic	Plastic filter	Ventilator Filter
FG-80	☞	FS-80	MA-03

Part No.	Bearing system	Rated Voltage (V)	Freq (Hz)	Current (A)	Input Power (W)	Speed (rpm)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise Level (dB-A)	Weight (g)
8038A1HSAL 8038A1HBAL	Sleeve Ball	110/120	50/60	0.11/0.15	10.8/17	2600/2800	24/30	0.11/0.17	25.3/31.6	293
8038A2HSAL 8038A2HBAL	Sleeve Ball	220/240	50/60	0.06/0.08	12.7/20.7	2600/2800	24/30	0.11/0.17	25.3/31.6	293

Specifications subject to change without notice.

