MFB9733B

Size : 97 x 97 x 33 mm
Bearing system: BALL,SLEEVE
Frame: plastic PBT UL94V-0
Impeller:plastic PBT UL94V-0
Operating Temp :
BALL: -10 ~ 70°C
Sleeve: -10 ~ 70°C
Life Expectancy
BALL:50,000 hours at 25°C
SLEEVE : 25,000 hours at 25°C
Weight: 195 g

Bearing system

BALL	SLEEVE
●	●

Available Functions

FG	PWM	RD	LD
●	●	●	●

MODEL	Rated Voltge	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximun Air Flow	Maimun Air Pressure	Noise
PART NO.	VDC	VDC	Amp	Watt	R.P.M	CFM	mmH2O	DB-A
MFB9733BD1-L	12	7.0 ~ 13.2	0.9	10.8	4500	36.7	41.79	56
MFB9733BD1-M			1.1	13.2	4850	39.2	49.95	57
MFB9733BD1-H			1.4	16.8	5250	43.1	62.18	59
MFB9733BD1-HH			1.8	21.6	5750	47.3	77.47	61
MFB9733BD1-VH			2.9	34.8	6850	56.8	130.49	66
MFB9733BD2-L	24	12 ~ 2645	0.45	10.8	4500	36.7	41.79	56
MFB9733BD2-M			0.55	13.2	4850	39.2	49.95	57
MFB9733BD2-H			0.7	16.8	5250	43.1	62.18	59
MFB9733BD2-HH			0.83	19.9	5750	47.3	77.47	61
MFB9733BD2-VH			1.62	38.8	6850	56.8	130.49	66
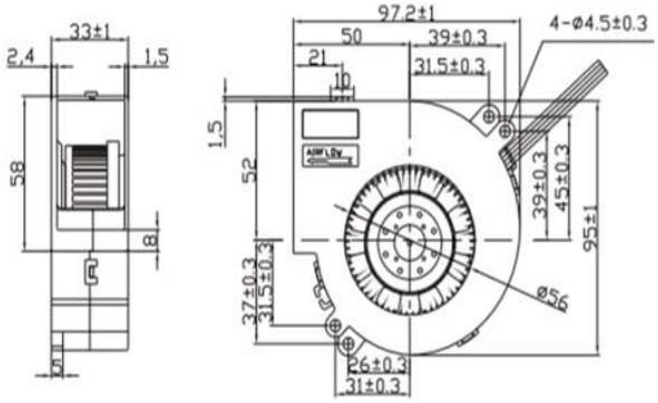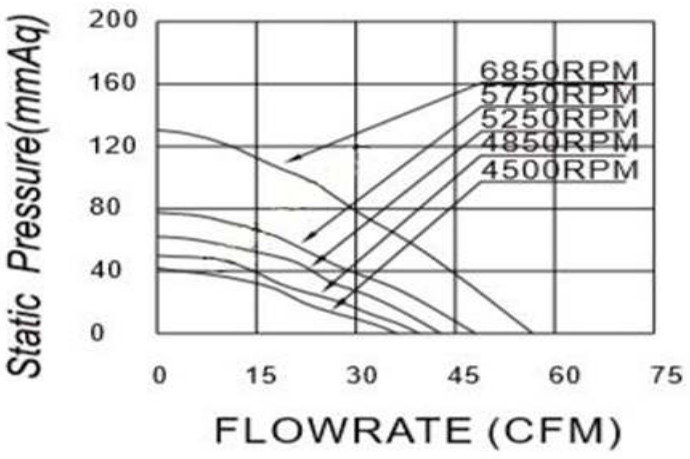
DIMENSIONS DRAWING & P&Q CURVE