

MFE6025C

EC Fan

Size	60 x 60 x 25 mm
Voltage	AC 80-230 V (per complete part number)
Motor	EC electronically commutated motor
Frame	PBT Plastic, UL94V-0
Impeller	PBT Plastic, UL94V-0
Bearing Type	Ball Bearing
Control Method	VPWM DC voltage speed control (optional)
Operating Temperature	-10 ~ 70°C
Life Expectancy	50,000 hours (25°C)


60 x 60 x 25 mm


Airflow **12.3-18.6 CFM** Speed **3000-4500 RPM** Noise **24.2-34.3 dB(A)**


Signal Interface **FG / VPWM / RDH / RDL / LD are model-dependent option...**

Model	Rated Voltage (V)	Operating Voltage Range (V)	Input Power (W)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mmH_2O)	Noise (dB-A)
MFE6025C-L	220	80-230	1.0	3000	12.3	2.12	24.2
MFE6025C-M	220	80-230	1.2	3500	14.1	2.84	27.4
MFE6025C-H	220	80-230	1.9	4500	18.6	4.61	34.3

Specifications subject to change without notice. Specifications governed by the official approval sheet

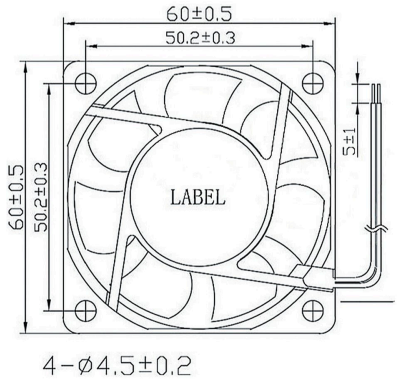



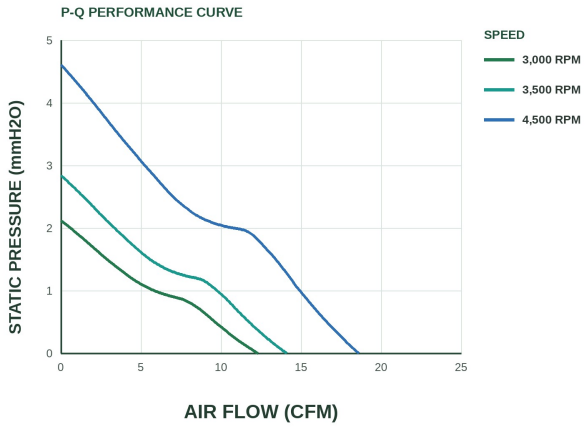

DIMENSIONS (mm)

P-Q CURVE