



MFL25093

SPECIFICATIONS


Model	MFL25093
Dimensions	Ø250x93mm
Airflow	1500~3100 RPM
Speed	1500~3100 RPM
Noise Level	424~876.2 CFM
Voltage	12V / 24V / 48V DC
Bearing	Ball Bearing
Bearing Type	Ball Bearing / Sleeve Bearing
Operating Temperature	Ball Bearing: -10 ~ 70°C / Sleeve Bearing: 0 ~ 60°C
Life Expectancy	Ball Bearing: 50,000 hours at 25°C / Sleeve Bearing: 30,000 hours at 25°C



PART NUMBER & PERFORMANCE

Model	Rated Voltage (V)	Operating Voltage	Rated Current (A)	Input Power (W)	Speed (RPM)	Max. Airflow (CF)	Max. Pressure (m)	Noise (dB-A)
MFL25093D1-L	24	18 ~ 26.5	4.5	108	1500	424	40.6	42
MFL25093D1-M	24	18 ~ 26.5	5.6	134.4	2000	565.3	54.1	56
MFL25093D1-H	24	18 ~ 26.5	7.2	172.8	3100	876.2	83.9	86.8
MFL25093D2-L	48	36 ~ 54	2.2	105.6	1500	424	40.6	42
MFL25093D2-M	48	36 ~ 54	2.9	139.2	2000	565.3	54.1	56
MFL25093D2-H	48	36 ~ 54	3.9	187.2	3000	848	81.2	84

DIMENSIONS

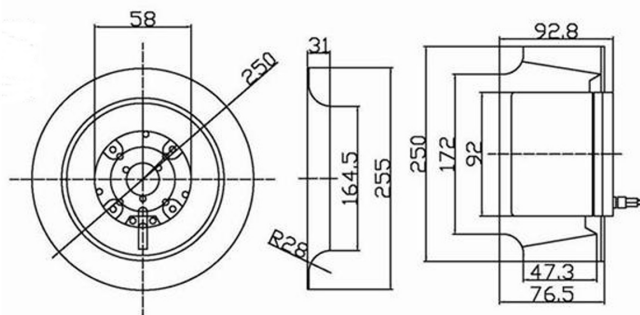

P-Q CURVE

