

MFL6025

DC Centrifugal Fan

Size	60 x 60 x 25 mm
Motor	DC Brushless
Voltage	5 / 24 VDC
Frame	PBT Plastic, UL94V-0
Bearing Type	Ball Bearing
Operating Temperature	-10 ~ 70°C
Life Expectancy	50,000 hours (25°C)
Weight	161 g


60 x 60 x 25 mm

Airflow **6.71~7.88 CFM** Speed **3200~3700 RPM** Noise **34~39 dB(A)**


Signal Interface **FG / PWM / RDH / RDL / LD are model-dependent options ...**

Model	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (A)	Input Power (W)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mmH_2O)	Noise (dB-A)
MFL6025D05-M	5	3.6 ~ 6.8	0.24	1.2	3200	6.71	10.88	34
MFL6025D2-H	24	18 ~ 26.5	0.06	1.5	3700	7.88	15.49	39

Specifications subject to change without notice. Specifications governed by the official approval sheet

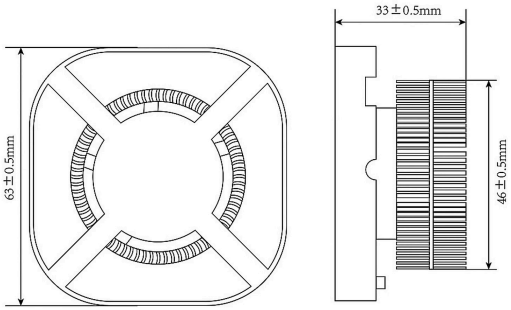

DIMENSIONS (mm)

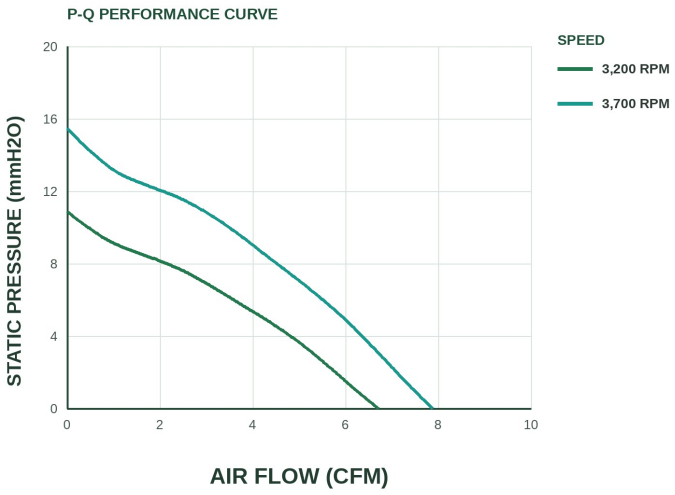

P-Q CURVE