



MFB12032B

DC 鼓風機

尺寸	120 x 120 x 32 mm
馬達	無刷直流
電壓	5V / 12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)

120 x 120 x 32 mm

風量 32.35~65.96 CFM 轉速 2500~5000 RPM 噪音 50.4~64.7 dB(A)


訊號介面 **FG • PWM • RD • LD •** | 已核對

型號	額定電壓 (V)	工作電壓範圍 (V)	額定電流 (A)	輸入功率 (W)	轉速 (RPM)	最大風量 (CFM)	最大靜壓 (mmH ₂ O)	噪音 (dB-A)
MFB12032BD1-L	12	7 ~ 13.8	0.8	6	2500	32.35	18.98	50.4
MFB12032BD1-M	12	7 ~ 13.8	1.4	7.8	3000	40.35	29.28	52.3
MFB12032BD1-H	12	7 ~ 13.8	1.8	20.1	3500	46.38	40.17	58.3
MFB12032BD1-HH	12	7 ~ 13.8	2.4	26.4	4000	52.44	54.63	59
MFB12032BD1-VH	12	7 ~ 13.8	3	36	4500	59.32	73.11	62.2
MFB12032BD1-HV	12	7 ~ 13.8	3.6	43.2	5000	65.96	83.6	64.7
MFB12032BD2-L	24	18 ~ 26.5	0.4	9.6	2500	32.35	18.98	50.4
MFB12032BD2-M	24	18 ~ 26.5	0.7	16.8	3000	40.35	29.28	52.3
MFB12032BD2-H	24	18 ~ 26.5	0.9	21.6	3500	46.38	40.17	58.3
MFB12032BD2-HH	24	18 ~ 26.5	1.2	28.8	4000	52.44	54.63	59
MFB12032BD2-VH	24	18 ~ 26.5	1.5	36	4500	59.32	73.11	62.2
MFB12032BD2-HV	24	18 ~ 26.5	1.8	43.2	5000	65.96	83.6	64.7
MFB12032BD4-L	48	36 ~ 54	0.2	9.6	2500	32.35	18.98	50.4
MFB12032BD4-M	48	36 ~ 54	0.35	16.8	3000	40.35	29.28	52.3
MFB12032BD4-H	48	36 ~ 54	0.45	21.6	3500	46.38	40.17	58.3
MFB12032BD4-HH	48	36 ~ 54	0.6	28.8	4000	52.44	54.63	59
MFB12032BD4-VH	48	36 ~ 54	0.75	36	4500	59.32	73.11	62.2
MFB12032BD4-HV	48	36 ~ 54	0.9	43.2	5000	65.96	83.6	64.7


■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

■ 本系列外框與 P-Q 圖續下頁。

MFB12032B 外框與 P-Q 圖

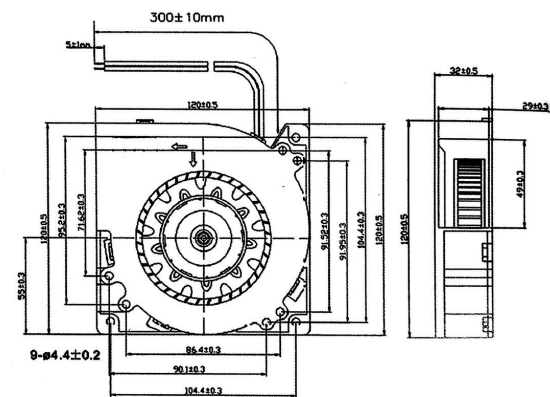

外觀尺寸圖 DIMENSIONS (mm)

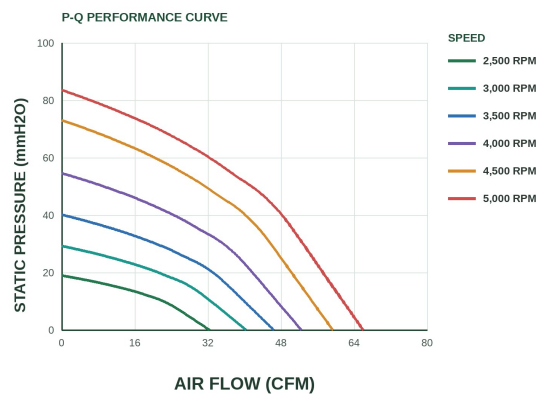

風量 - 靜壓曲線 P-Q CURVE