



MFD12038

DC 風扇

尺寸	120 x 120 x 38mm
電壓	5V / 12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
扇葉	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)



120 x 120 x 38mm

風量 96.55~311.68 CFM 轉速 2500~11000 RPM 噪音 43.4~71.9 dB(A)

訊號介面 FG • PWM • RD • LD • | 已核對

型號	電壓 (V)	電流 (A)	功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (mmH ₂ O)	噪音 (dB-A)
MFD12038D1-L	12	0.2	2.4	2500	96.55	5.91	43.4
MFD12038D1-M	12	0.33	3.96	3000	111.26	8.66	47.7
MFD12038D1-VM	12	0.47	5.64	3500	132.14	11.94	52.8
MFD12038D1-H	12	0.7	8.4	4000	152.89	15.46	54.5
MFD12038D1-HH	12	1.3	15.6	4500	169.37	19.73	58.1
MFD12038D1-VH	12	0.8	21.6	5000	189.97	24.4	62.1
MFD12038D1-HV	12	2.1	25.2	5500	209.92	29.28	65.2
MFD12038D2-L	24	0.13	3.12	2500	96.55	5.91	43.4
MFD12038D2-M	24	0.18	4.32	3000	111.26	8.66	47.7
MFD12038D2-VM	24	0.3	7.2	3500	132.14	11.94	52.8
MFD12038D2-H	24	0.45	10.8	4000	152.89	15.46	54.5
MFD12038D2-HH	24	0.6	14.4	4500	169.37	19.73	58.1
MFD12038D2-VH	24	0.7	16.8	5000	189.97	24.4	62.1
MFD12038D2-HV	24	0.9	21.6	5500	209.92	29.28	65.2
MFD12038D4-L	48	0.08	3.6	2500	96.55	5.91	43.4
MFD12038D4-M	48	0.12	5.76	3000	111.26	8.66	47.7
MFD12038D4-VM	48	0.19	9.12	3500	132.14	11.94	52.8
MFD12038D4-H	48	0.27	12.9	4000	152.89	15.46	54.5
MFD12038D4-HH	48	0.3	14.4	4500	169.37	19.73	58.1
MFD12038D4-VH	48	0.45	21.6	5000	189.97	24.4	62.1
MFD12038D4-HV	48	0.5	24	5500	209.92	29.28	65.2

規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

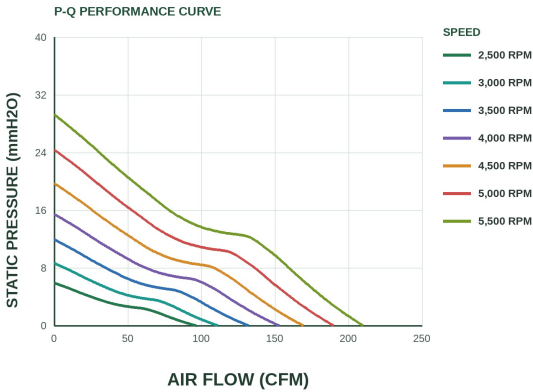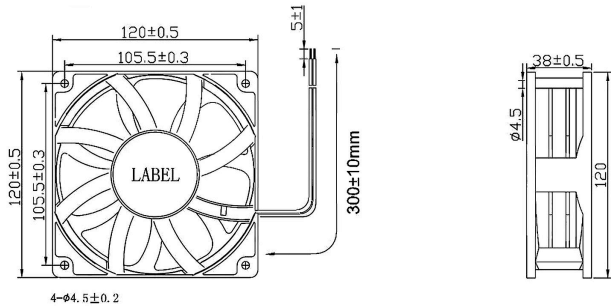

外觀尺寸圖 DIMENSIONS (mm)

風量 - 靜壓曲線 P-Q CURVE