



MFD12038B

DC 風扇

尺寸	120 x 120 x 38mm
電壓	5V / 12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
扇葉	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)



120 x 120 x 38mm

風量 108.28~248.46 CFM 轉速 2500~5500 RPM 噪音 52.4~71.9 dB(A)

訊號介面 原廠系列資料未標示；請依承認書確認 | 未標示

型號	電壓 (V)	電流 (A)	功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (mmH ₂ O)	噪音 (dB-A)
MFD12038BD1-L	12	0.35	4.2	2500	108.28	7.16	52.4
MFD12038BD1-M	12	0.85	10.2	3000	131.62	10.43	56
MFD12038BD1-VM	12	1.38	16.6	3500	157.4	14.2	57.6
MFD12038BD1-H	12	1.9	22.8	4000	179.8	18.15	62.4
MFD12038BD1-HH	12	2.4	28.8	4500	200.78	22.96	66.7
MFD12038BD1-VH	12	2.8	33.6	5000	225.59	28.02	69.8
MFD12038BD1-HV	12	3	36	5500	248.46	33.14	71.9
MFD12038BD2-L	24	0.18	4.2	2500	108.28	7.16	52.4
MFD12038BD2-M	24	0.43	10.2	3000	131.62	10.43	56
MFD12038BD2-VM	24	0.7	16.6	3500	157.4	14.2	57.6
MFD12038BD2-H	24	0.95	22.8	4000	179.8	18.15	62.4
MFD12038BD2-HH	24	1.2	28.8	4500	200.78	22.96	66.7
MFD12038BD2-VH	24	1.4	33.6	5000	225.59	28.02	69.8
MFD12038BD2-HV	24	1.85	44.4	5500	248.46	33.14	71.9
MFD12038BD4-L	48	0.09	4.2	2500	108.28	7.16	52.4
MFD12038BD4-M	48	0.21	10.2	3000	131.62	10.43	56
MFD12038BD4-VM	48	0.35	16.6	3500	157.4	14.2	57.6
MFD12038BD4-H	48	0.48	22.8	4000	179.8	18.15	62.4
MFD12038BD4-HH	48	0.6	28.8	4500	200.78	22.96	66.7
MFD12038BD4-VH	48	0.7	33.6	5000	225.59	28.02	69.8
MFD12038BD4-HV	48	0.75	36	5500	248.46	33.14	71.9

規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

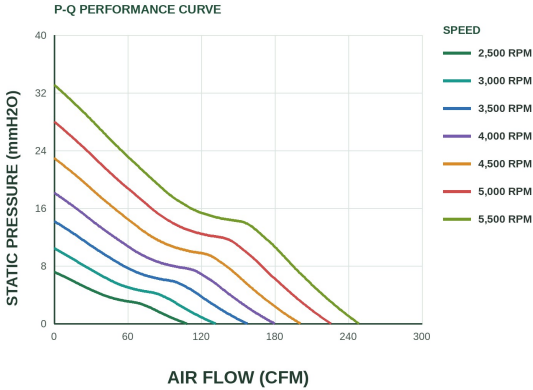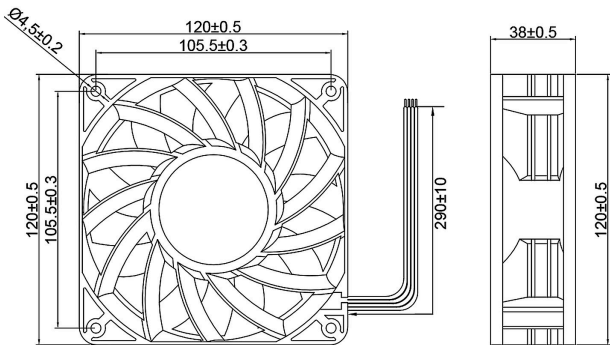

外觀尺寸圖 DIMENSIONS (mm)

風量 - 靜壓曲線 P-Q CURVE