



MFD4010

DC 風扇

- 尺寸

電壓

框架

扇葉

軸承類型

工作溫度

預期壽命
- 40 x 40 x 10 mm

5V / 12V / 24V / 48V DC

塑膠 PBT UL94V-0

塑膠 PBT UL94V-0

滾珠軸承 / 含油軸承

滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C

滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)




40 x 40 x 10 mm

風量 4.06~8.02 CFM 轉速 4500~8500 RPM 噪音 24.2~40.2 dB(A)

訊號介面 FG • PWM • RD • LD • | 已核對

型號	電壓 (V)	電流 (A)	功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (mmH ₂ O)	噪音 (dB-A)
MFD4010BD05-L	5	0.08	0.4	4500	4.31	1.71	24.2
MFD4010CD05-L	5	0.07	0.36	4500	4.06	1.73	25.1
MFD4010BD05-LV	5	0.13	0.65	5000	4.81	2.21	27.3
MFD4010CD05-LV	5	0.1	0.48	5000	4.51	2.12	26.2
MFD4010BD05-LM	5	0.14	0.72	5500	5.23	2.54	29.2
MFD4010CD05-LM	5	0.12	0.6	5500	5.34	2.68	28.1
MFD4010BD05-ML	5	0.17	0.84	6000	5.8	3.06	31.1
MFD4010CD05-M	5	0.14	0.72	6000	5.84	3.29	29.6
MFD4010BD05-M	5	0.17	0.84	6500	6.24	3.5	33.4
MFD4010CD05-H	5	0.17	0.84	6500	6.23	3.6	31.2
MFD4010BD05-H	5	0.19	0.96	7000	6.59	3.91	35.1
MFD4010CD05-HH	5	0.19	0.96	7000	6.68	4.02	33.7
MFD4010BD05-HL	5	0.22	1.08	7500	7.1	4.51	37.1
MFD4010BD05-HH	5	0.24	1.2	8000	7.73	5.22	39.1
MFD4010BD05-VH	5	0.26	1.32	8500	8.02	5.57	40.2
MFD4010BD1-L	12	0.03	0.4	4500	4.31	1.71	24.2
MFD4010CD1-L	12	0.03	0.36	4500	4.06	1.73	25.1
MFD4010BD1-LV	12	0.05	0.65	5000	4.81	2.21	27.3
MFD4010CD1-LV	12	0.04	0.48	5000	4.51	2.12	26.2
MFD4010BD1-LM	12	0.06	0.72	5500	5.23	2.54	29.2
MFD4010CD1-LM	12	0.05	0.6	5500	5.34	2.68	28.1
MFD4010BD1-ML	12	0.07	0.84	6000	5.8	3.06	31.1
MFD4010CD1-M	12	0.06	0.72	6000	5.84	3.29	29.6
MFD4010BD1-M	12	0.07	0.84	6500	6.24	3.5	33.4
MFD4010CD1-H	12	0.07	0.84	6500	6.23	3.6	31.2
MFD4010BD1-H	12	0.08	0.96	7000	6.59	3.91	35.1
MFD4010CD1-HH	12	0.08	0.96	7000	6.68	4.02	33.7
MFD4010BD1-HL	12	0.09	1.08	7500	7.1	4.51	37.1
MFD4010BD1-HH	12	0.1	1.2	8000	7.73	5.22	39.1
MFD4010BD1-VH	12	0.11	1.32	8500	8.02	5.57	40.2

規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

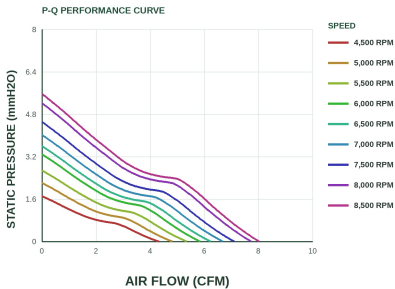

外觀尺寸圖 DIMENSIONS (mm)

風量 - 靜壓曲線 P-Q CURVE