



MFD6015B

DC 風扇

尺寸	60 x 60 x 15mm
電壓	5V / 12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
扇葉	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)




60 x 60 x 15mm

風量 9.41~24 CFM 轉速 2000~6000 RPM 噪音 21.1~41 dB(A)

訊號介面 原廠系列資料未標示；請依承認書確認 | 未標示

型號	額定電壓 (V)	工作電壓範圍 (V)	額定電流 (A)	輸入功率 (W)	轉速 (RPM)	最大風量 (CFM)	最大靜壓 (mmH ₂ O)	噪音 (dB-A)
MFD6015BD05-L	5	1.8~6	0.1	0.72	2000	9.41	1.34	21.1
MFD6015BD05-M	5	1.8~6	0.19	0.96	3000	11.5	1.86	24.8
MFD6015BD05-ML	5	1.8~6	0.24	1.2	3500	14.2	2.61	29.8
MFD6015BD05-H	5	1.8~6	0.29	1.44	4000	16.4	3.5	31.2
MFD6015BD1-L	12	8.5~13.5	0.04	0.72	2000	9.41	1.34	21.1
MFD6015BD1-M	12	8.5~13.5	0.09	0.96	3000	11.5	1.86	24.8
MFD6015BD1-ML	12	8.5~13.5	0.1	1.2	3500	14.2	2.61	29.8
MFD6015BD1-H	12	8.5~13.5	0.12	1.44	4000	16.4	3.5	31.2
MFD6015BD1-HL	12	8.5~13.5	0.14	1.68	4500	18.3	4.35	34.8
MFD6015BD1-HH	12	8.5~13.5	0.16	1.92	5000	20.5	5.34	36.6
MFD6015BD1-HV	12	8.5~13.5	0.18	2.16	5500	22.4	6.35	39
MFD6015BD1-VH	12	8.5~13.5	0.28	2.4	6000	24	7.33	41
MFD6015BD2-L	24	18~26.5	0.03	0.72	2000	9.41	1.34	21.1
MFD6015BD2-M	24	18~26.5	0.04	0.96	3000	11.5	1.86	24.8
MFD6015BD2-ML	24	18~26.5	0.05	1.2	3500	14.2	2.61	29.8
MFD6015BD2-H	24	18~26.5	0.06	1.44	4000	16.4	3.5	31.2
MFD6015BD2-HL	24	18~26.5	0.07	1.68	4500	18.3	4.35	34.8
MFD6015BD2-HH	24	18~26.5	0.08	1.92	5000	20.5	5.34	36.6
MFD6015BD2-HV	24	18~26.5	0.09	2.16	5500	22.4	6.35	39
MFD6015BD2-VH	24	18~26.5	0.1	2.4	6000	24	7.33	41

規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

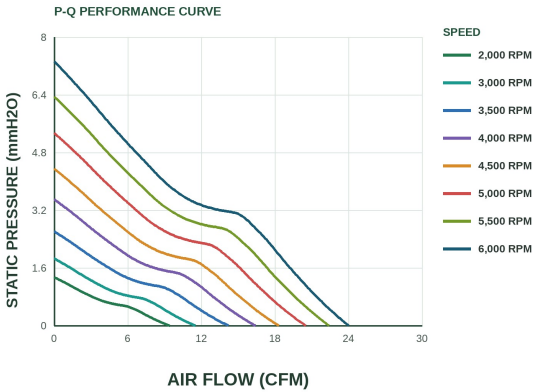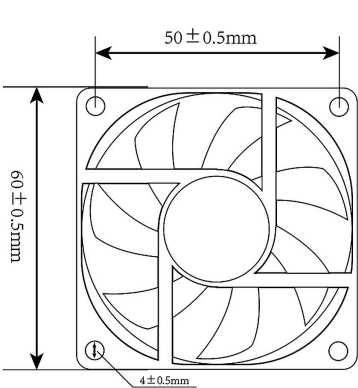

外觀尺寸圖 DIMENSIONS (mm)

風量 - 靜壓曲線 P-Q CURVE