



MFD8032

DC 風扇

尺寸	80 x 80 x 32 mm
電壓	5V / 12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
扇葉	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)



80 x 80 x 32 mm

風量 49.89~107.13 CFM 轉速 4000~8500 RPM 噪音 46.8~63.5 dB(A)

訊號介面 FG ● PWM ● RD ● LD ● | 已核對

型號	電壓 (V)	電流 (A)	功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (mmH ₂ O)	噪音 (dB-A)
MFD8032D1-L	12	0.4	4.8	4000	49.89	8.51	46.8
MFD8032D1-M	12	0.68	8.16	5000	61.29	11.63	50.3
MFD8032D1-H	12	0.96	11.5	6000	75.5	16.78	52
MFD8032D1-HH	12	1.24	14.9	7000	88.93	22.39	54.2
MFD8032D1-HV	12	1.84	22.1	8500	107.13	32.9	63.5
MFD8032D1-VH	12	1.51	18.2	8500	100.8	29.53	61.2
MFD8032D2-L	24	0.2	4.8	4000	49.89	8.51	46.8
MFD8032D2-M	24	0.34	8.16	5000	61.29	11.63	50.3
MFD8032D2-H	24	0.48	11.5	6000	75.5	16.78	52
MFD8032D2-HH	24	0.62	14.9	7000	88.93	22.39	54.2
MFD8032D2-HV	24	0.92	22.1	8500	107.13	32.9	63.5
MFD8032D2-VH	24	0.76	18.2	8500	100.8	29.53	61.2
MFD8032D4-L	48	0.1	4.8	4000	49.89	8.51	46.8
MFD8032D4-M	48	0.17	8.16	5000	61.29	11.63	50.3
MFD8032D4-H	48	0.24	11.5	6000	75.5	16.78	52
MFD8032D4-HH	48	0.31	14.9	7000	88.93	22.39	54.2
MFD8032D4-HV	48	0.46	22.1	8500	107.13	32.9	63.5
MFD8032D4-VH	48	0.38	18.2	8500	100.8	29.53	61.2

■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

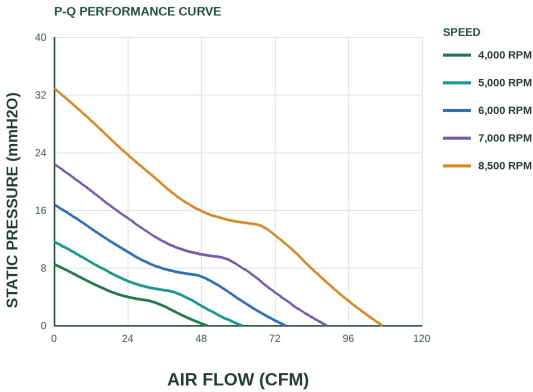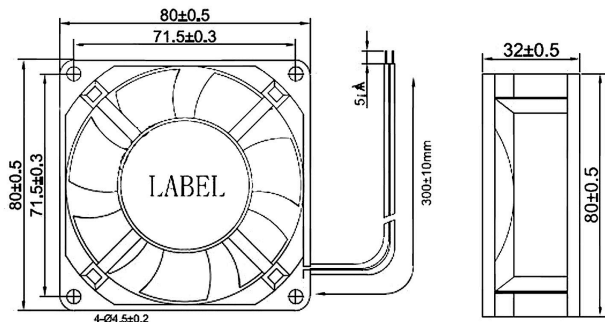

外觀尺寸圖 DIMENSIONS (mm)

風量 - 靜壓曲線 P-Q CURVE