



MFD9225F

DC 風扇

尺寸	92 x 92 x 25 mm
電壓	5V / 12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
扇葉	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)




92 x 92 x 25 mm

風量 46.8~96.9 CFM 轉速 2500~5000 RPM 噪音 35.5~55 dB(A)

訊號介面 原廠系列資料未標示；請依承認書確認 | 未標示

型號	電壓 (V)	電流 (A)	功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (mmH ₂ O)	噪音 (dB-A)
MFD9225FD1-L	12	0.3	3.6	2500	46.8	3.98	35.5
MFD9225FD1-M	12	0.45	5.4	3000	56.6	5.71	41.1
MFD9225FD1-H	12	0.51	6.12	3500	69.1	7.81	45.5
MFD9225FD1-HH	12	0.64	7.68	4000	77.3	10.08	48.3
MFD9225FD1-HV	12	0.81	9.72	4500	87.6	12.87	53.7
MFD9225FD1-VH	12	1.1	13.2	5000	96.9	15.57	55
MFD9225FD2-L	24	0.15	3.6	2500	46.8	3.98	35.5
MFD9225FD2-M	24	0.23	5.4	3000	56.6	5.71	41.1
MFD9225FD2-H	24	0.26	6.12	3500	69.1	7.81	45.5
MFD9225FD2-HH	24	0.32	7.68	4000	77.3	10.08	48.3
MFD9225FD2-HV	24	0.4	9.72	4500	87.6	12.87	53.7
MFD9225FD2-VH	24	0.55	13.2	5000	96.9	15.57	55
MFD9225FD4-L	48	0.07	3.6	2500	46.8	3.98	35.5
MFD9225FD4-M	48	0.11	5.4	3000	56.6	5.71	41.1
MFD9225FD4-H	48	0.13	6.12	3500	69.1	7.81	45.5
MFD9225FD4-HH	48	0.16	7.68	4000	77.3	10.08	48.3
MFD9225FD4-HV	48	0.2	9.72	4500	87.6	12.87	53.7
MFD9225FD4-VH	48	0.28	13.2	5000	96.9	15.57	55

■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

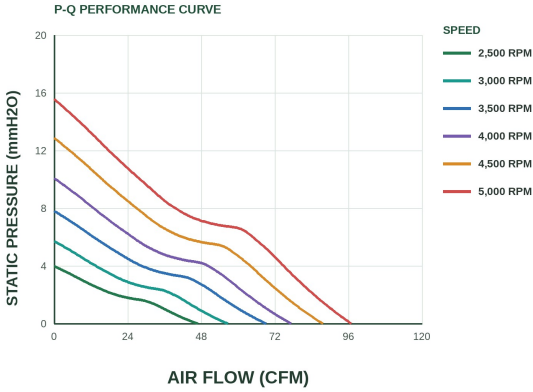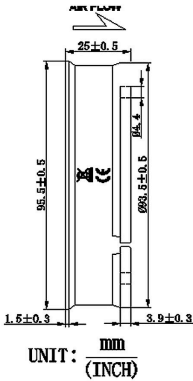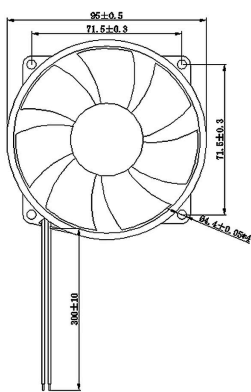

外觀尺寸圖 DIMENSIONS (mm)

風量 - 靜壓曲線 P-Q CURVE