



MFL10025

DC 離心風扇

尺寸	Ø 100 x 25 mm
馬達	無刷直流
電壓	12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)


Ø 100 x 25 mm

風量 24.1~43.5 CFM 轉速 2500~4500 RPM 噪音 31~55.9 dB(A)


訊號介面 FG • PWM • RD • LD • | 已核對

型號	額定電壓 (V)	工作電壓範圍 (V)	額定電流 (A)	輸入功率 (W)	轉速 (RPM)	最大風量 (CFM)	最大靜壓 (mmH ₂ O)	噪音 (dB-A)
MFL10025D1-L	12	7 ~ 13.5	0.12	1.44	2500	24.1	13.16	31
MFL10025D1-M	12	7 ~ 13.5	0.24	2.88	3000	29	15.79	37.2
MFL10025D1-H	12	7 ~ 13.5	0.3	3.6	3500	33.8	18.42	43.5
MFL10025D1-HH	12	7 ~ 13.5	0.4	4.8	4000	38.6	21.06	49.7
MFL10025D1-VH	12	7 ~ 13.5	0.53	6.36	4500	43.5	23.69	55.9
MFL10025D2-L	24	18 ~ 26.5	0.06	1.44	2500	24.1	13.16	31
MFL10025D2-M	24	18 ~ 26.5	0.12	2.88	3000	29	15.79	37.2
MFL10025D2-H	24	18 ~ 26.5	0.15	3.6	3500	33.8	18.42	43.5
MFL10025D2-HH	24	18 ~ 26.5	0.2	4.8	4000	38.6	21.06	49.7
MFL10025D2-VH	24	18 ~ 26.5	0.27	6.36	4500	43.5	23.69	55.9

■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

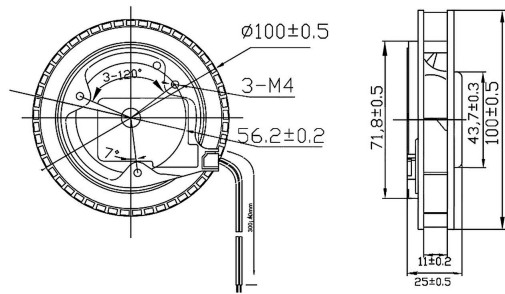

外觀尺寸圖 DIMENSIONS (mm)

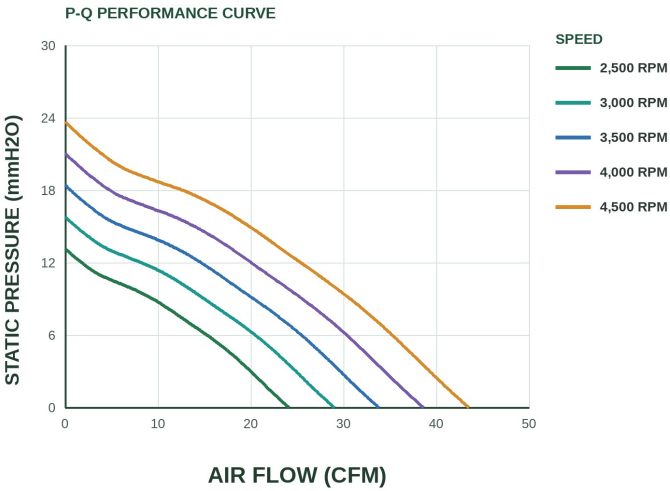

風量 - 靜壓曲線 P-Q CURVE