



MFL12025

DC 離心風扇

尺寸	Ø 120 x 25 mm
馬達	無刷直流
電壓	12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)


Ø 120 x 25 mm

風量 57.29~69.69 CFM 轉速 2500~3500 RPM 噪音 45~53.5 dB(A)


訊號介面 **FG • PWM • RD • LD •** | 已核對

型號	額定電壓 (V)	工作電壓範圍 (V)	額定電流 (A)	輸入功率 (W)	轉速 (RPM)	最大風量 (CFM)	最大靜壓 (mmH ₂ O)	噪音 (dB-A)
MFL12025D1-M	12	7~13.5	0.4	4.8	2500	57.29	13.95	45
MFL12025D1-H	12	7~13.5	0.5	6	3000	68.14	17.74	49.6
MFL12025D1-HH	12	7~13.5	0.7	8.4	3500	69.69	21.18	53.5
MFL12025D2-M	24	18~26.5	0.25	6	2500	57.29	13.95	45
MFL12025D2-H	24	18~26.5	0.35	8.4	3000	68.14	17.74	49.6
MFL12025D2-HH	24	18~26.5	0.53	12.72	3500	69.69	21.18	53.5
MFL12025D4-M	48	36~54	0.15	7.2	2500	57.29	13.95	45
MFL12025D4-H	48	36~54	0.2	9.6	3000	68.14	17.74	49.6
MFL12025D4-HH	48	36~54	0.32	14.4	3500	69.69	21.18	53.5

■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

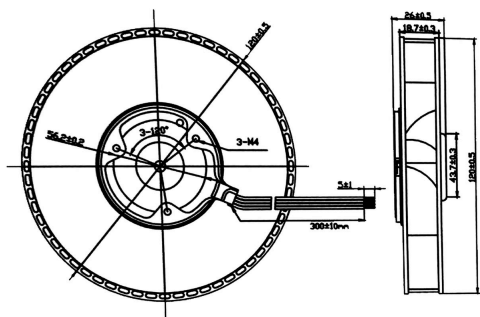

外觀尺寸圖 DIMENSIONS (mm)

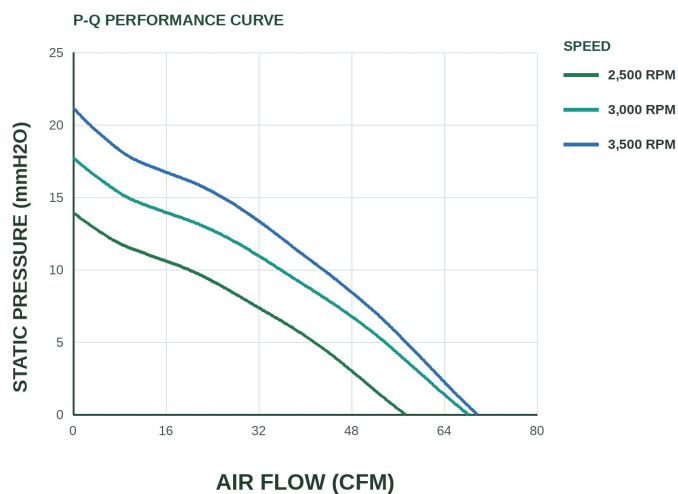

風量 - 靜壓曲線 P-Q CURVE