



MFL17569

DC 離心風扇

尺寸	Ø 175 x 69 mm
馬達	無刷直流
電壓	12V / 24V / 48V DC
框架	塑膠 PBT UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -10 ~ 70°C / 含油軸承: 0 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (25°C) / 含油軸承: 30,000 小時 (25°C)

Ø 175 x 69 mm

風量 161.3~382.75 CFM 轉速 1500~3600 RPM 噪音 41.8~65.8 dB(A)


訊號介面 **FG • PWM • RD • LD •** | 已核對

型號	額定電壓 (V)	工作電壓範圍 (V)	額定電流 (A)	輸入功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (mmH ₂ O)	噪音 (dB-A)
MFL17569D1-L	12	7 ~ 13.8	1	12	1500	161.3	9.87	41.8
MFL17569D1-M	12	7 ~ 13.8	1.3	15.6	2000	216.64	17.35	51.2
MFL17569D1-H	12	7 ~ 13.8	2.5	30	2500	266.35	26.6	57.2
MFL17569D1-HH	12	7 ~ 13.8	4	48	3000	327.6	38.95	61.2
MFL17569D1-VH	12	7 ~ 13.8	4.5	54	3300	345.68	45.28	64.1
MFL17569D1-HV	12	7 ~ 13.8	5	60	3600	382.75	53.8	65.8
MFL17569D2-L	24	18 ~ 26.5	0.5	12	1500	161.3	9.87	41.8
MFL17569D2-M	24	18 ~ 26.5	0.64	15.36	2000	216.64	17.35	51.2
MFL17569D2-H	24	18 ~ 26.5	1.05	25.2	2500	266.35	26.6	57.2
MFL17569D2-HH	24	18 ~ 26.5	1.7	40.8	3000	327.6	38.95	61.2
MFL17569D2-VH	24	18 ~ 26.5	2.2	52	3300	345.68	45.28	64.1
MFL17569D2-HV	24	18 ~ 26.5	2.7	64.8	3600	382.75	53.8	65.8
MFL17569D4-L	48	36 ~ 54	0.25	12	1500	161.3	9.87	41.8
MFL17569D4-M	48	36 ~ 54	0.5	24	2000	216.64	17.35	51.2
MFL17569D4-H	48	36 ~ 54	0.75	36	2500	266.35	26.6	57.2
MFL17569D4-HH	48	36 ~ 54	1	48	3000	327.6	38.95	61.2
MFL17569D4-VH	48	36 ~ 54	1.25	60	3300	345.68	45.28	64.1
MFL17569D4-HV	48	36 ~ 54	1.5	72	3600	382.75	53.8	65.8


■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

■ 本系列外框與 P-Q 圖續下頁。

MFL17569 外框與 P-Q 圖

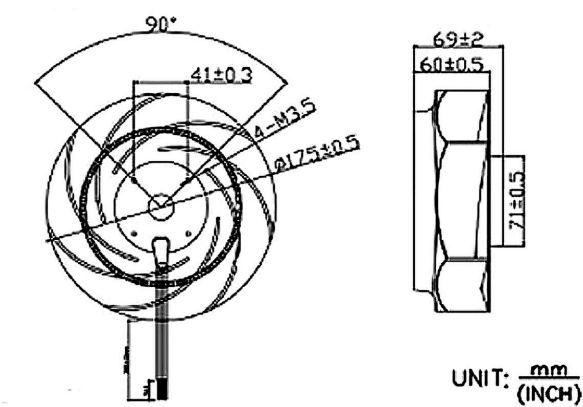

外觀尺寸圖 DIMENSIONS (mm)

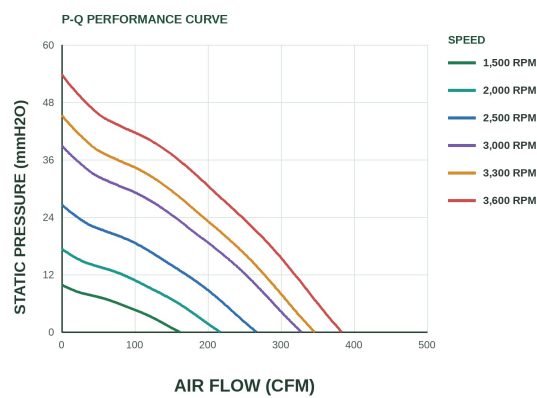

風量 - 靜壓曲線 P-Q CURVE