

MFL19069

SPECIFICATIONS


Model	MFL19069
Dimensions	Ø190x69mm
Airflow	1900~3500 RPM
Speed	1900~3500 RPM
Noise Level	186.5~343.6 CFM
Voltage	12V / 24V / 48V DC
Bearing	Ball Bearing
Bearing Type	Ball Bearing / Sleeve Bearing
Operating Temperature	Ball Bearing: -10 ~ 70°C / Sleeve Bearing: 0 ~ 60°C
Life Expectancy	Ball Bearing: 50,000 hours at 25°C / Sleeve Bearing: 30,000 hours at 25°C



PART NUMBER & PERFORMANCE

Model	Rated Voltage (V)	Operating Voltage	Rated Current (A)	Input Power (W)	Speed (RPM)	Max. Airflow (CF)	Max. Pressure (m)	Noise (dB-A)
MFL19069D1-L	24	18 ~ 26.5	1.0	24	1900	186.5	41.5	42.8
MFL19069D1-M	24	18 ~ 26.5	2.1	50.4	2600	255.2	56.8	58.6
MFL19069D1-H	24	18 ~ 26.5	4.7	112.8	3500	343.6	76.5	78.9
MFL19069D2-L	48	36 ~ 54	0.4	19	1900	186.5	39	40.6
MFL19069D2-M	48	36 ~ 54	1.0	48	2600	255.2	56.8	58.6
MFL19069D2-H	48	36 ~ 54	2.5	120	3500	343.6	76.5	78.9

DIMENSIONS

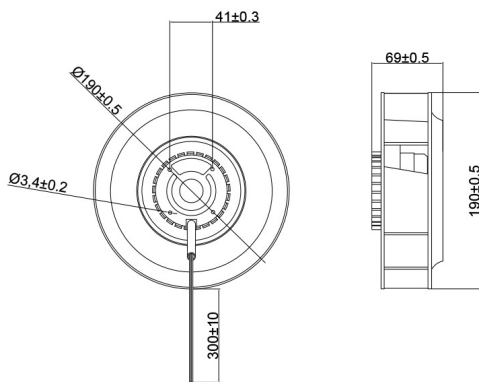

P-Q CURVE

