



MF12025

AC 軸流風扇


尺寸	120 x 120 x 25mm (4.71 x 4.71 x 1.0inch)
電壓	110 / 220 VAC, 50/60 Hz
馬達	蔽極式
框架	鋁合金壓鑄
扇葉	PBT + 30% 玻璃纖維 UL94V-0
軸承類型	滾珠軸承 / 含油軸承
工作溫度	滾珠軸承: -20 ~ 80°C / 含油軸承: -10 ~ 60°C
預期壽命	滾珠軸承: 50,000 小時 (60°C) / 含油軸承: 30,000 小時 (40°C)

120 x 120 x 25mm (4.71 x 4.71 x 1.0inch)


風量 56~85 CFM 轉速 2000~2700 RPM 噪音 33~44 dB(A)

型號	額定電壓 (V)	頻率 (Hz)	電流 (A)	輸入功率 (W)	轉速 (RPM)	風量 (CFM)	靜壓 (inch-H ₂ O)	噪音 (dB-A)	重量 (g)
MF12025A1-LBAPL	110/120	50/60	0.08/0.07	6/8	2000/2200	56/64	0.11/0.13	33/37	338
MF12025A1-LBAPT									
MF12025A1-LSAPL									
MF12025A1-LSAPT									
MF12025A1-HBAPL	110/120	50/60	0.19/0.18	14/17	2500/2700	70/85	0.13/0.18	40/44	338
MF12025A1-HBAPT									
MF12025A1-HSAPL									
MF12025A1-HSAPT									
MF12025A2-LBAPL	220/240	50/60	0.04/0.03	6/8	2000/2200	56/64	0.11/0.13	33/37	338
MF12025A2-LBAPT									
MF12025A2-LSAPL									
MF12025A2-LSAPT									
MF12025A2-HBAPL	220/240	50/60	0.09/0.08	14/17	2500/2700	70/85	0.13/0.18	40/44	338
MF12025A2-HBAPT									
MF12025A2-HSAPL									
MF12025A2-HSAPT									

■ 規格如有變更，恕不另行通知。 Specifications subject to change without notice. 產品規格以正式承認書為準

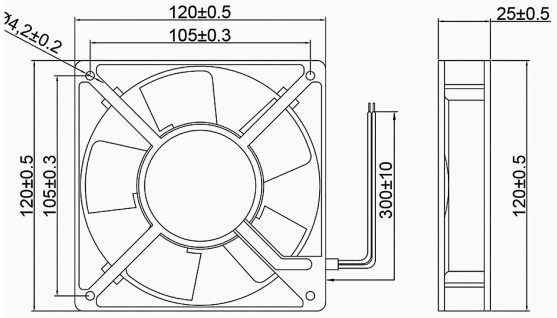

外觀尺寸圖 DIMENSIONS (mm)

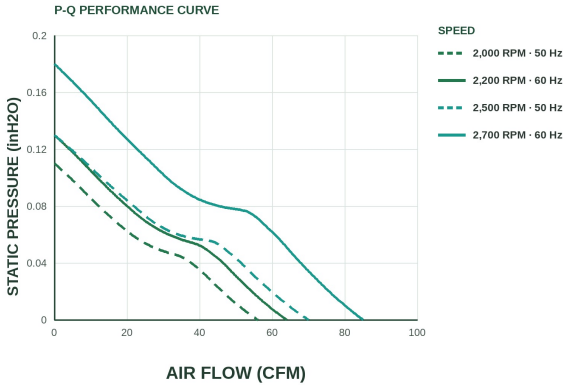

風量 - 靜壓曲線 P-Q CURVE